

PRODUCT INFORMATION

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND FOLLOWING
CATALOGUE NUMBER

SAT043

(Page 1 of 2)

Sucking Oil Drainer

Feature :

- It is easy used to suck oil in low pressure.
- The oil drainer makes use of compressed air as power to produce vacuum in order to achieve its sucking function.
- It is a safe, convenient and quick machine. It never bring spark to you.
- This machine is mainly used in garage, cars beautification, and cars producing, etc.
- It can collect and fill oil for cars or other machines to achieve its fixed or movable working functions.
The movable body could meet your needs of using it in different places at any time.
- The outside-layed cursor shows you the height of oil clearly.
- Each machine is equipped with different specifications of nozzles(three kinds size).

Warning :

- The temperature must be below 70-80 °C when draining oil.
- Never use it for corrosive products.

Specification :

Sucking speed: 0.6-1.6 Liter / min.

Sucking pressure: 3.5 - 6.5 Bar (50 - 95 psi)

Draining pressure: 0.3 - 0.8 Bar (4.35 - 11.60 psi)

Length of suction pipe: 1.4 M

Length of drain pipe: 2.3 M

Total sucking capacity: 50 - 52 Liter, 82 - 86 Liter

AT6521 (50 - 52 Liter)


AT6523 (82 - 86 Liter)



Bidirectional Hand Oil Pump

(sucking & filling)

AT6525



Feature :

- This pump has bidirectional character, both for sucking and filling oil.
- The structure of this pump is easy compact, and convenient to use and maintain.
- This pump has good self-sucking function. Never need to be filled liquid before using it, but only to speed up by hand.
- The pump can self-lubricate when transporting liquid, so it is no need to be added lubrication in daily works.
- This pump adapts to use gasoline, diesel oil etc, but is not suitable for that containing horniness grain, fibre or impurities.

Specification :

Sucking speed: 13 Liter / 80R, 23 rpm

The two output mouths of the pump body is NPT 3/4"



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL. No.325, FU HSING N. ROAD.
TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX : 886-2-27152218
<http://www.himount.com/>
E - MAIL: himount@himount.com

PRODUCT INFORMATION

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND FOLLOWING
CATALOGUE NUMBER



SAT043
(Page 2 of 2)

Facility Oil Drain

AT6511



Facility oil tray for collecting trashy oil
Height and operating direction adjustable.

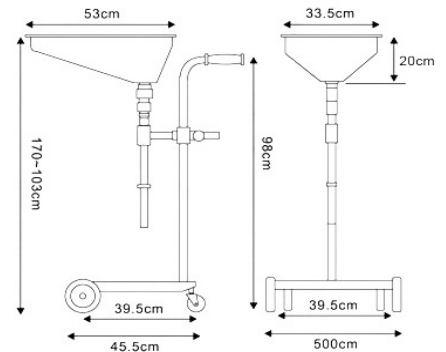



18 Gallon Oil Drainer Self Evacuating

AT6513



Extends
from 124 cm
to 176 cm

- Heavy duty receiver funnel (33.5 cm x 53 cm)
- Extends from 124 cm to 176 cm
- 2 x 6" Wheels
- 2 x 4" Swivel casters for maximum maneuverability.
- 8" discharge hose with shut off valve
- Fluid level gauge is on the hose
- Air pressure valve
- Shop air up to 150 psi
- Capacity: 18 Gallons

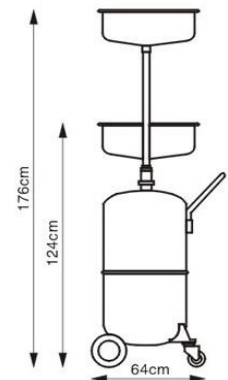


30 Gallon Oil Drain Tank

AT6515



Extends
from 122 cm
to 177 cm

- Tube height can be adjusted from 122 cm to 177 cm for draining fluids on vehicle lifts. Standard shop air pressure quickly empties used fluids from the storage tank.
- Heavy duty triangle drainage funnel with filter screen.
- 2M evacuation hose with 1/4" air coupler.
- Oil level sight gauge
- Draining pressure: 7 psi
- 2 x Swivel casters: 4" D x 1-1/5" W
- 2 x Wheels: 7" D x 1-1/2" W
- Capacity: 30 Gallons

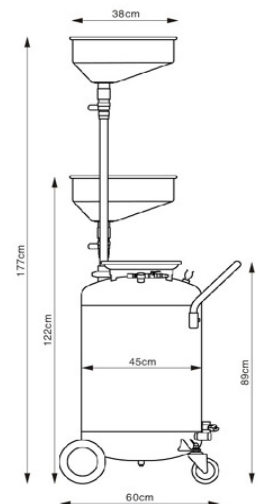

HIMOUNT INDUSTRIAL CO., LTD.
7TH FL. No.325, FU HSING N. ROAD.
TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX : 886-2-27152218
<http://www.himount.com/>
E - MAIL: himount@himount.com