

AUTOMOTIVE TESTER

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND
FOLLOWING
CATALOGUE NUMBER
SAT092


AT128146 - Leaking Current Meter



- * DISPLAY: 2000 COUNTS; 3 1/2 DIGITS LCD
- * RESOLUTION: 1mA / 10mA
- * MAXIMUM CURRENT MEASURED: 20A
- * FUSE TYPE: ATO (REGULAR) FUSE / MINI FUSE / LOW-PROFILE MINI FUSE
- * REFRESH RATE: 3 TIMES PER SECONDS
- * LOW VOLTAGE INDICATION
- * ACCURACY: $\pm 0.5\%$ ± 2 DIGITS
- * POWER: 1.5V AAA BATTERY X 2 (3V)

AT037941 - Relay Tester

- * VEHICLE RELAY TESTING FOR 3 MOST POPULAR KIND OF RELAYS.
- * POWER: 12V / 24V VEHICLE BATTERY.
- * SUPPORT BOTH 4 PIN / 5 PIN RELAY.
- * PROBLEM PIN INDICATION.
- * WORKING TEMPERATURE: 0 ~ 50°C (32 ~ 122°F); < 85%RH
- * STORAGE TEMPERATURE: -20 ~ 60°C (-4 ~ 140°F); < 85%RH

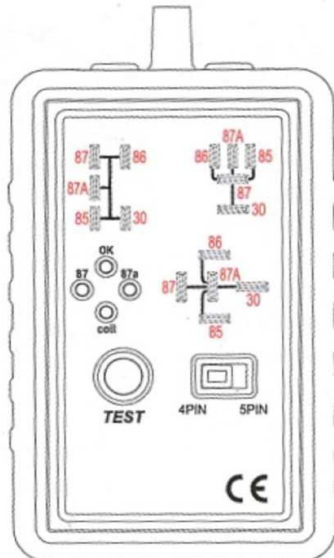

Pin Numbers of the relay



20220624 YJD

dun & bradstreet
D-U-N-S® CERTIFIED
D-U-N-S® Number 65-602-8172



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL., NO. 325, FU HSING N. ROAD, TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX: 886-2-27152218
E-MAIL: info@himount.com
<http://www.himount.com/>