

WIDE VISION HEADLIGHT

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND
FOLLOWING
CATALOGUE NUMBER
SET133

ET341328 - 2 Power Sources



Light:

Front 2pc x CREE LED + 1pc RED LED
Rear 1pc RED/GREEN LED (indicator & tail light)

Power Source:

1pc 3.7V 1000mAh Lithium Batt.

OR

3pcs "AAA" Dry Batt. (Not included)

Charging port: Type C

Size:

Head lamp: 68*33*42 mm

Batt. box: 68*25*42 mm

Net Weight: 89g (Head lamp+Batt. box)

Material: ABS/PC

Switch modes:

High > Med > Low > RED > Flashing >

Press 1s to off

ANSI FLI STANDARD	Max.Light output	Max.runtime	Peak beam intensity	Beam Distance	Impact Resistant	Water Proof
Full	500LM±20%	2H±20%	500CD ±20%	45M ±20%	1M	IPX4
Normal	150LM±20%	3.5H±20%				
Low	70LM±20%	4.5H±20%				
RED LED	5LM±20%	9H±20%				
Flashing	—	5.5H±20%				

Applications:

Unique Optical Lens provide Focused & Broad beams.
Illuminating both far & near sights to make night hiking
safer and easier.

The Wide Vision Headlight also suits for utility purposes
such as DIY, Repairing, reading, mountaineering and
camping,..., etc.

ET341328 2- High Power Capacity



Light:

Front 2pc x CREE LED

Switch button 1pc RED/GREEN LED for indicator

Power Source:

1pc 3.7V 1800mAh 18650 Lithium Batt.

Charging port: Type C

Size:

Head lamp: 68*33*42 mm

Batt. box: 78*36*33 mm



Net Weight: 133g (Head lamp+Batt. box)

Material: ABS/PC

Switch modes:

High > Med > Low > Flashing > Press 1s to off

ANSI FLI STANDARD	Max.Light output	Max.runtime	Peak beam intensity	Beam Distance	Impact Resistant	Water Proof
Full	500LM±20%	4±20%H	800±20% CD	56±20% M	1M	IPX4
Normal	150LM±20%	7±20%H				
Low	60LM±20%	11±20%H				
Flashing	—	30±20%H				

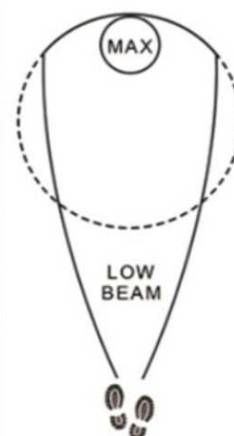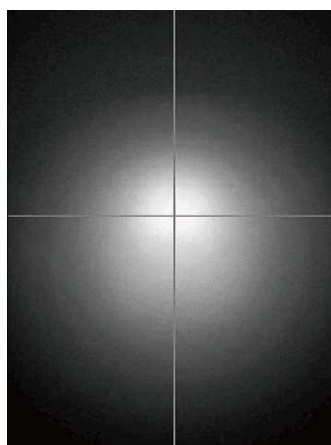

dun & bradstreet
D-U-N-S® CERTIFIED
D-U-N-S® Number 65-602-8172



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL., NO. 325, FU HSING N. ROAD, TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX: 886-2-27152218
E-MAIL: info@himount.com
<http://www.himount.com/>