

HEIGHT ADJUSTABLE WORKTABLE

FOR YOUR INQUIRIES,
PLEASE
INDICATE MODEL NO., AND
FOLLOWING
CATALOGUE NUMBER
SMH046

MH219002



Features:

Base frame: 1100 x 640mm

Loading capacity: 300kg

Working height: 425-1020mm

4 x 5" TPU castors with lock



[View Video](#)

Applications:

The height of the work surface can be infinitely adjusted between 1020 and 425 mm. This is easily achieved with the smooth-running hydraulic foot pump. The four lockable castors ensure that the table remains manoeuvrable.

With different top plates, it can be used as a working table, storage aid or stacking trolley.

Different top boards for options



Using high-quality tool steel material

A: 38GRMOAL material, multiple heat treatments, nitriding depth of 0.3-0.5mm, HV \geq 800, flatness \leq 0.38mm. The surface is orange or black, wear-resistant and smooth.

B: Made of high-quality carbon bonded steel 45 "material with a nitriding thickness of 0.3-0.5, HV \geq 500, and flatness \leq 0.38mm. Customers can choose to order.




SPECIAL PROCESSING TECHNOLOGY ENABLES THE FLATNESS OF THE WELDING WORKTABLE TO REACH 0.19/0.38F MM/M WITH HIGH WELDING QUALITY (COMBINATION OF MORTISE AND FALCON)



Quality of welded parts can made a flatness of 0.19/0.38mm/m



Density board




Density board veneer
No edging/edging



Beech multi layer board



PVC foam board

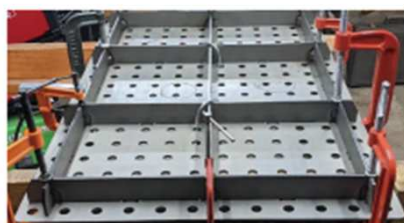

1130322-YJD

dun & bradstreet
D-U-N-S® CERTIFIED
D-U-N-S® Number 65-602-8172



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL. No.325, FU HSING N. ROAD.
TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX: 886-2-27152218
<http://www.himount.com/>
E-MAIL: info@himount.com