




FOR YOUR ENQUIRES, PLEASE
INDICATE MODEL NO. AND FOLLOWING
CATALOGUE NUMBER
SMS009

HORIZONTAL BAND SAW

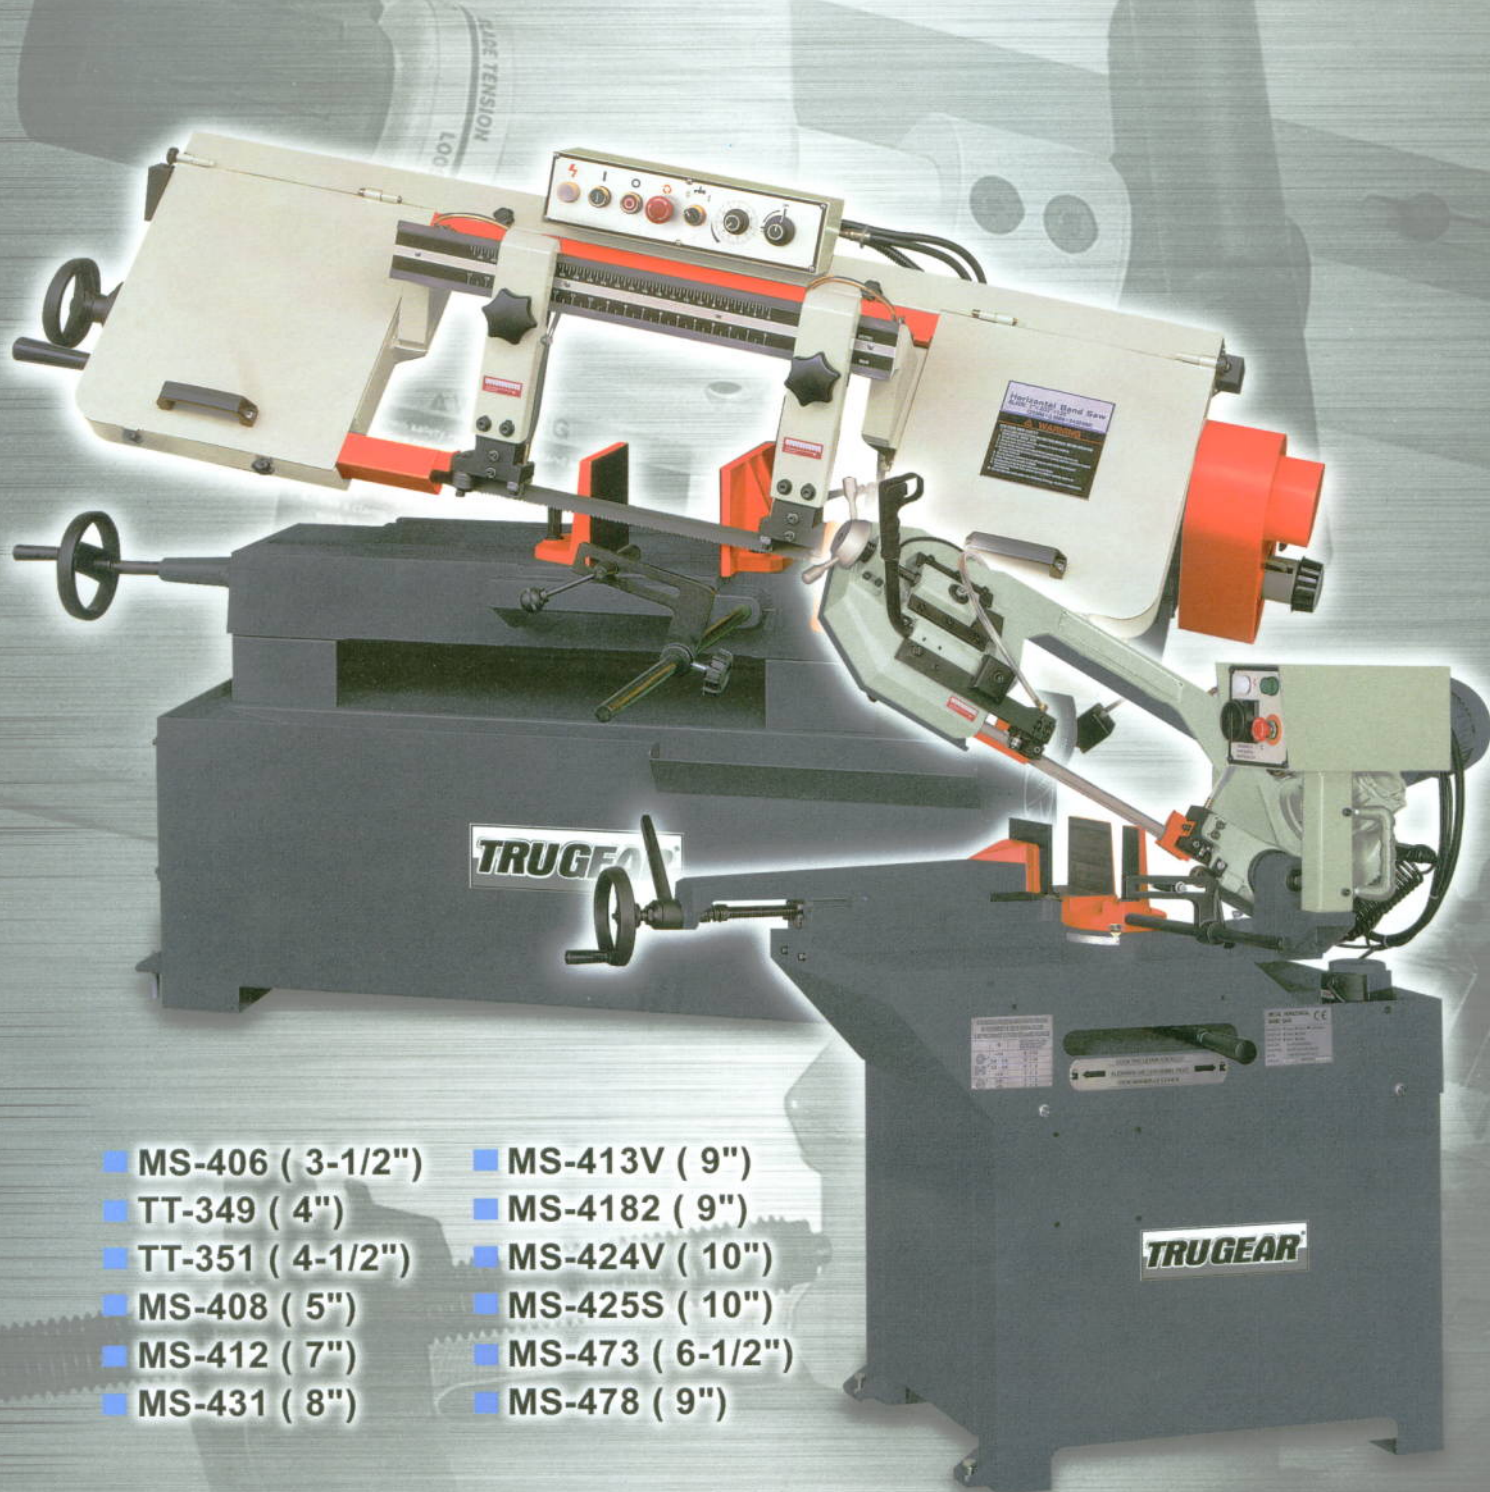

- | | |
|---------------------|---------------------|
| ■ MS-406 (3-1/2") | ■ MS-413V (9") |
| ■ TT-349 (4") | ■ MS-4182 (9") |
| ■ TT-351 (4-1/2") | ■ MS-424V (10") |
| ■ MS-408 (5") | ■ MS-425S (10") |
| ■ MS-412 (7") | ■ MS-473 (6-1/2") |
| ■ MS-431 (8") | ■ MS-478 (9") |

3 1/2"

MS-406

Head Swivel 0° ~ 45°

■ Blade Tension Control




■ Suitably Carry To Any Work Sites

4"

TT-349

■ Blade Tension Control
■ Quick Positioning Vise

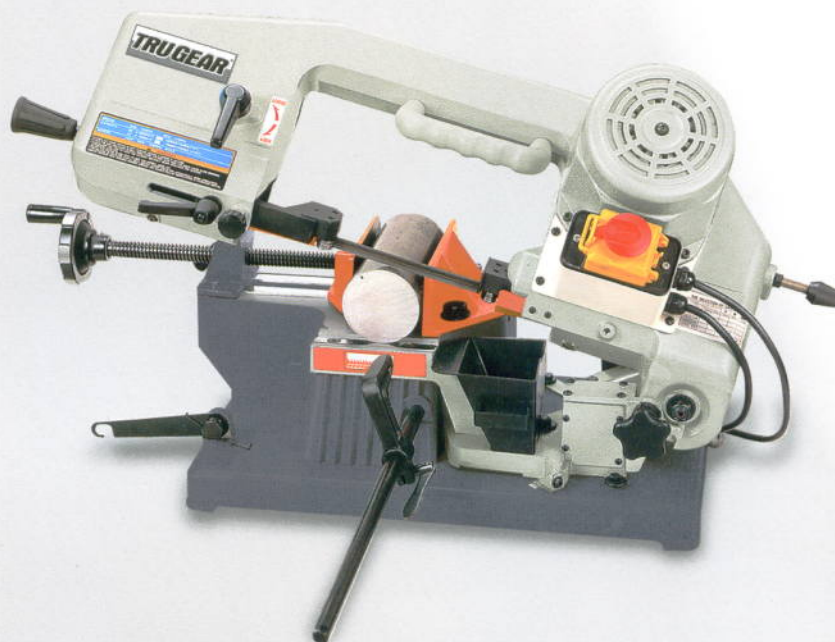

■ Suitably Carry To Any Work Sites

	MS-406		TT-349	
CAPACITY 90°	● 3-1/2" (90mm)	■ 3-1/2" x 5" (90 x 130mm)	● 4" (100mm)	■ 4" x 6" (100 x 150mm)
45°	● 2-1/2" (65mm)	■ 3-1/2" x 2-1/2" (90 x 65mm)	● 2-1/2" (65mm)	■ 2-1/2" x 4" (65 x 100mm)
MOTOR	1/4 HP		1/2 HP, 4 Pole	
BLADE SPEED	20, 29, 50 MPM		45 MPM	
PACKING	750 x 315 x 470 mm (3.8 Cuft)		724 x 381 x 458 mm (4.5 Cuft)	
N.W./G.W.	26 Kgs / 28 Kgs		23 Kgs / 27 Kgs	

BAND SAWS


4 1/2"

TT-351

■ Blade Tension Control



● Optional Base and Vise can be added to become a regular saw

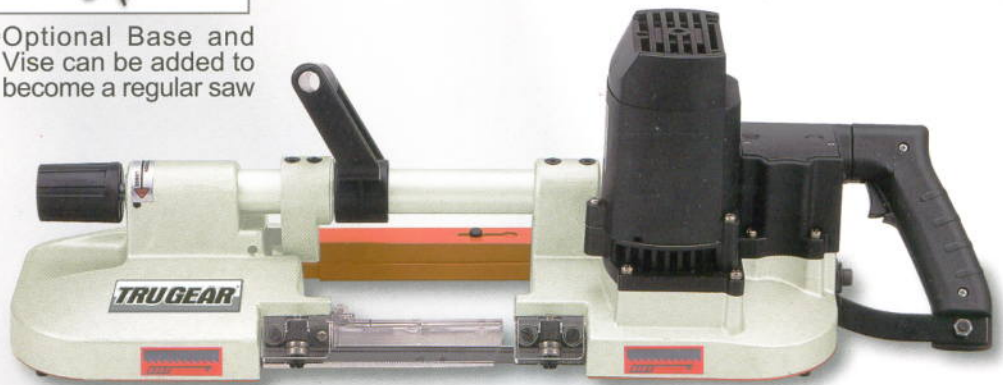

■ Suitably Carry To Any Work Sites

5"

MS-408

Head Swivel 0°~45°

■ Hydraulic Feed
■ Blade Tension Control
■ Quick Positioning Vise



● Cylinder Lifts 12mm



	TT-351	MS-408
CAPACITY 90° 45°	● 4-1/2" (115mm) ■ 4-1/2" x 5" (110 x 120mm)	● 5" (125mm) ■ 5" x 8" (125 x 200mm) ● 5" (125mm) ■ 5" x 5" (125 x 125mm)
MOTOR	320 W	1/3 HP
BLADE SPEED	48 MPM	20, 29, 50 MPM
PACKING	800 x 370 x 300 mm (3.2 Cuft)	1080 x 460 x 430 mm (8.0 Cuft)
N.W./G.W.	9 Kgs / 12 Kgs	65 Kgs / 70 Kgs

7"

MS-412

- Hydraulic Feed
- Blade Tension Control
- Quick Positioning Vise
- Coolant System



8"

MS-431

- Convenient Controls
- Hydraulic Feed
- Blade Tension Control
- Quick Positioning Vise
- Coolant System



	MS-412	MS-431
CAPACITY 90°	● 7" (180mm) ■ 7" x 11" (180 x 280mm)	● 8" (210mm) ■ 8" x 14" (210 x 360mm)
45°	● 4-3/8" (110mm) ■ 7" x 4-3/8" (180 x 110mm)	● 8" (110mm) ■ 8" x 8" (210 x 210mm)
MOTOR	1 HP	1-1/2 HP
BLADE SPEED	22, 33, 45, 65 MPM	25, 40, 51, 71 MPM
PACKING	1270 x 457 x 1028 mm (21.0 Cuft)	1635 x 585 x 1100 mm (37.0 Cuft)
N.W./G.W.	130 Kgs / 150 Kgs	230 Kgs / 280 Kgs

BAND SAWS



MS-413V

Variable Speed

- Convenient Controls
- Hydraulic Feed
- Blade Tension Control
- Quick Positioning Vise
- Coolant System
- Step Speed Machine Is Available



MS-4182

Variable Speed
Head+Bed Swivel 0°~45°

- Convenient Controls
- Hydraulic Feed
- Blade Tension Control
- Quick Positioning Vise
- Coolant System
- Step Speed Machine Is Available



	MS-413V	MS-4182
CAPACITY 90°	● 9" (225mm) ■ 9" x 13-1/2" (225 x 345mm)	● 9" (225mm) ■ 9" x 17" (225 x 430mm)
45°	● 6-1/2" (165mm) ■ 6-1/2" x 9" (165 x 225mm)	● 9" (225mm) ■ 9" x 11" (225 x 295mm)
MOTOR	1-1/2 HP	2 HP
BLADE SPEED	Variable 25~75 MPM	Variable 25~75 MPM
PACKING	1803 x 749 x 1092 mm (52.0 Cuft)	1879 x 749 x 1117 mm (55.5 Cuft)
N.W./G.W.	285 Kgs / 320 Kgs	420 Kgs / 485 Kgs

10"

MS-424V

Variable Speed

- Convenient Controls
- Hydraulic Feed
- Blade Tension Control
- Quick Positioning Vise
- Coolant System
- Step Speed Machine Is Available



10"

MS-425S

Head+Bed Swivel 0°~45°

- Convenient Controls
- Hydraulic Feed
- Blade Tension Control
- Quick Positioning Vise
- Coolant System
- Variable Speed Machine Is Available



	MS-424V	MS-425S
CAPACITY 90°	● 10" (260mm) ■ 10" x 17" (260 x 430mm)	● 10" (260mm) ■ 10" x 17" (260 x 430mm)
45°	● 10" (260mm) ■ 10" x 12" (260 x 295mm)	● 10" (260mm) ■ 10" x 12" (260 x 295mm)
MOTOR	2 HP	2 HP
BLADE SPEED	Variable 25~75 MPM	25, 40, 51, 71 MPM
PACKING	1930 x 760 x 1130 mm (58.5 Cuft)	1930 x 760 x 1130 mm (58.5 Cuft)
N.W./G.W.	320 Kgs / 360 Kgs	420 Kgs / 480 Kgs

BAND SAWS

6 1/2"

MS-473

Head Swivel 0°~60°

- Convenient Controls
- Blade Tension Control
- Coolant System



9"

MS-478


Head Swivel 0°~45°

- Convenient Controls
- Blade Tension Control
- Coolant System

	MS-473	MS-478
CAPACITY 90°	● 170mm ■ 170 x 170mm	● 227mm ■ 220 x 200mm
45°	● 120mm ■ 110 x 110mm	● 150mm ■ 150 x 150mm
60°	● 70mm ■ 60 x 60mm	● 90mm ■ 90 x 90mm
MOTOR	2-Speed(4p / 8p). 2 HP	2-Speed(4p / 8p). 1-1/2 HP
BLADE SPEED	40, 80 MPM	36, 72 MPM
PACKING	1156 x 572 x 826 mm (19.3 Cuft)	1549 x 737 x 921 mm (37.0 Cuft)
N.W./G.W.	156 Kgs / 170 Kgs	216 Kgs / 250 Kgs

BAND SAWS

Features:

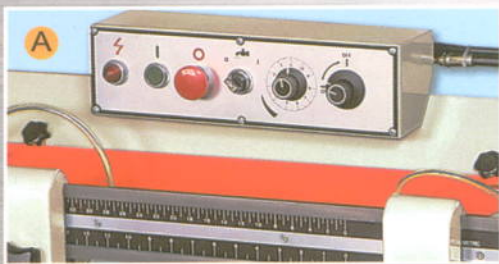


■ Front Control Panel for easy accessibility and operator safety.




■ Variable Speed drive system allows the operator to fine-tune the blade speed fast.



■ Quick Positioning Vise provides fast and convenient clamping.

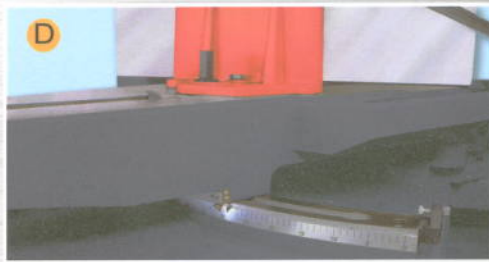

■ Swivel Mechanism provides mitre cutting of angle from 0°-45°, 60°.



■ Blade Tension control gives blade the proper tension.



■ Hydraulic Feed delivers a smooth consistent feed rate resulting in longer blade life.



■ Quick Lock Vise Handle delivers a sure clamping to the workpiece.



■ Coolant System offers efficient fluid circulation.

Feature	MS-406	TT-349	TT-351	MS-408	MS-412	MS-431	MS-413V	MS-4182	MS-424V	MS-425S	MS-473	MS-478
A Front Control Panel						●	●	●	●	●	●	●
B Variable Speed							●	●	●			
C Quick Positioning Vise		●	●	●	●	●	●	●	●	●		
D Swivel Mechanism	●			●				●		●	●	●
E Blade Tension Control	●	●	●	●	●	●	●	●	●	●	●	●
F Quick Lock Vise Handle											●	●
G Hydraulic Feed				●	●	●	●	●	●	●		
H Coolant System					●	●	●	●	●	●	●	●



HIMOUNT INDUSTRIAL CO., LTD.

7th FL., NO. 325, FU HSING N. RD., TAIPEI, TAIWAN R.O.C.

TEL : 886-2-27135577 886-2-27188886

FAX : 886-2-27152218

E-mail : himount@himount.com