




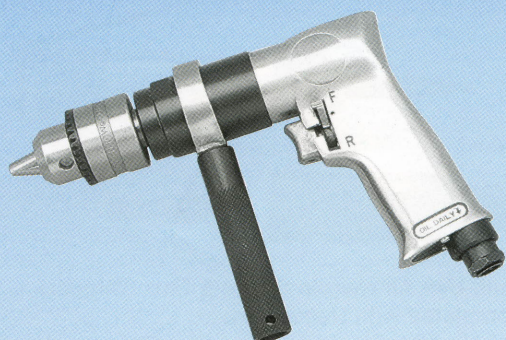


PT237 13mm, 800 RPM reversible
PT2372 13mm, 500 RPM reversible
PT233 13mm, 500 RPM
PT2332 13mm, 800 RPM

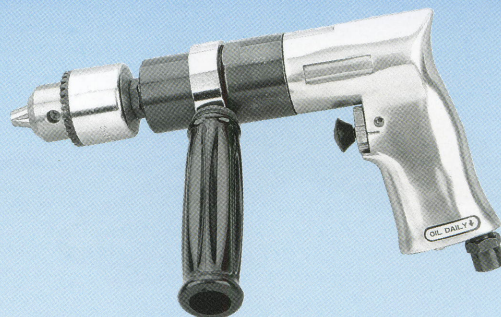


PT257 13mm, 400 RPM reversible
PT253 13mm, 450 RPM

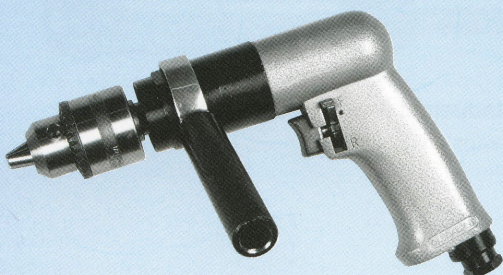


PT237I 13mm, 800 RPM reversible
Professional Model

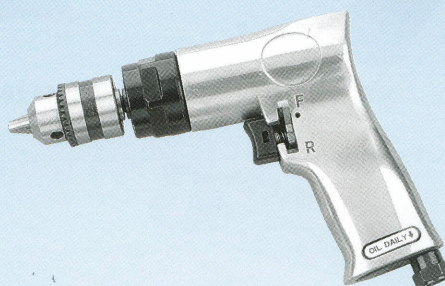


PT232 10mm, 1800 RPM reversible
PT230 10mm, 2200 RPM
PT231 10mm, 2600 RPM light duty

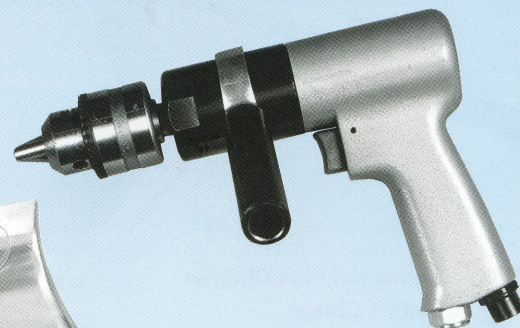

PT2713 13mm, 400 RPM
Professional Model

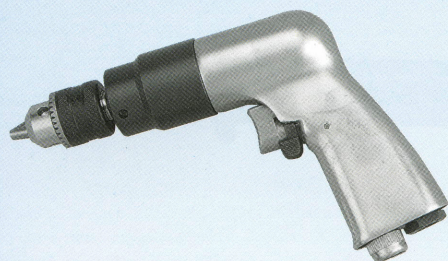


PT2925 10mm, 1200 RPM reversible
PT2926 10mm, 2000 RPM

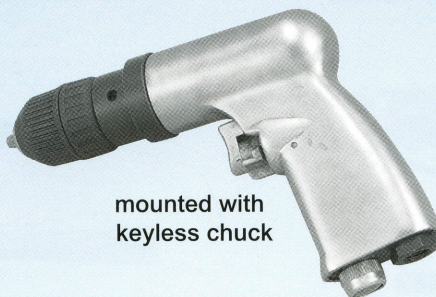

mounted with
keyless chuck

PT2928F 10mm, 900/1800 RPM reversible
PT2927F 10mm, 900/1800 RPM

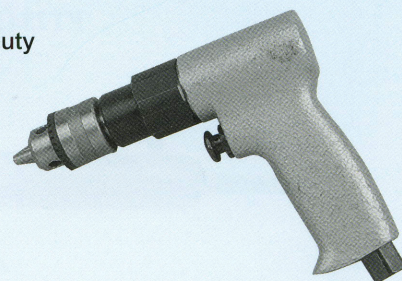

PT23262 6mm, 2800 RPM

MODEL NO.	CHUCK SIZE	SPEED RPM	SPINDLE SIZE	AIR CONS. $\ell / \text{min.}$	AIR INLET	HOSE SIZE	SOUND POWER / PRES. dBA		VIBRA. M/S^2	LENGTH MM	WEIGHT KG
PT237	1/2"	800	3/8"-24	110	1/4"	3/8"	96	83	2.5	175	1.8
PT2372	1/2"	500	3/8"-24	110	1/4"	3/8"	95	82	2.5	195	1.9
PT233	1/2"	500	3/8"-24	110	1/4"	3/8"	95	82	2.2	175	1.8
PT2332	1/2"	800	3/8"-24	110	1/4"	3/8"	93	80	2.2	195	1.7
PT257	1/2"	400	1/2"-20	125	1/4"	3/8"	98	84	2.6	180	1.6
PT253	1/2"	450	1/2"-20	125	1/4"	3/8"	98	84	2.6	180	1.4
PT237I	1/2"	800	3/8"-24	110	1/4"	3/8"	101	92	2.6	190	1.8
PT2713	1/2"	400	3/8"-24	110	1/4"	3/8"	99	89	2.6	178	1.8
PT232	3/8"	1800	3/8"-24	110	1/4"	3/8"	94	83	2.0	165	1.4
PT230	3/8"	2200	3/8"-24	110	1/4"	3/8"	94	83	2.0	165	1.2
PT231	3/8"	2600	3/8"-24	110	1/4"	3/8"	96	86	2.5	165	1.2
PT2925	3/8"	1200	3/8"-24	125	1/4"	3/8"	90	81	2.0	195	1.2
PT2926	3/8"	2000	3/8"-24	125	1/4"	3/8"	90	81	2.0	195	1.2
PT2928F	3/8"	900/1800	3/8"-24	125	1/4"	3/8"	92	82	2.0	200	1.2
PT2927F	3/8"	900/1800	3/8"-24	125	1/4"	3/8"	92	82	2.0	200	1.2
PT23262	1/4"	2800	3/8"-24	110	1/4"	3/8"	95	84	2.4	150	0.7