




PT2383 10mm, 2600 RPM

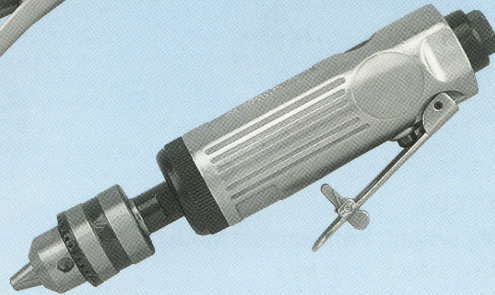


PT2385 10mm, 22000 RPM

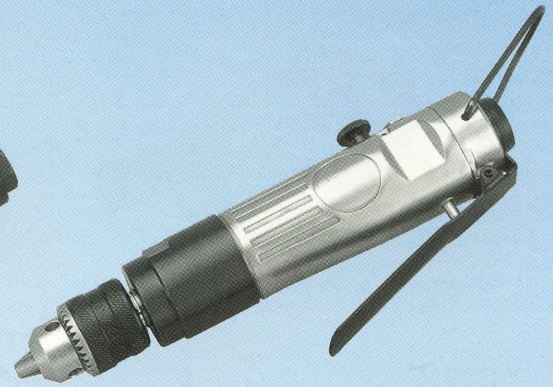

PT2380 10mm, 1500 RPM reversible

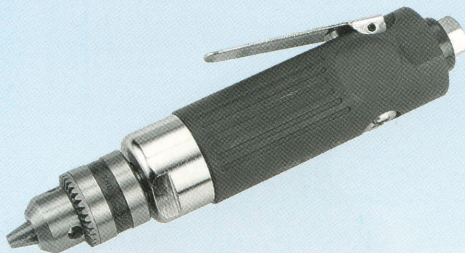


PT23842 10mm, 4000 RPM
with ergonomical grip

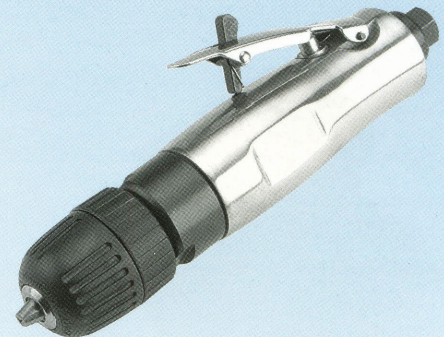


mounted with keyless chuck

PT23811F 10mm, 2000 RPM


PT23812F 10mm, 3800 RPM

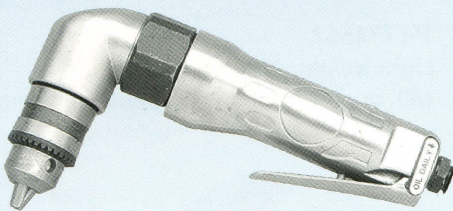


PT292 10mm, 1900 RPM

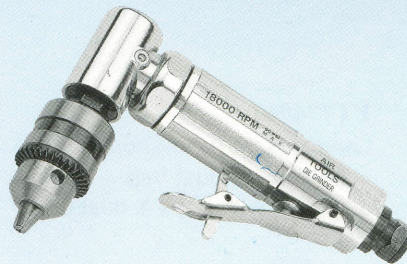

PT1445 10mm, 15000 RPM

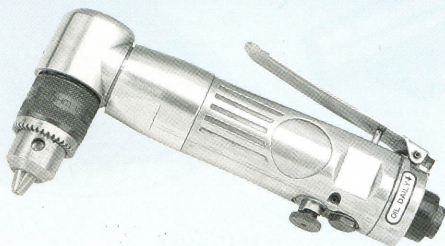

PT2924 10mm, 1400 RPM reversible

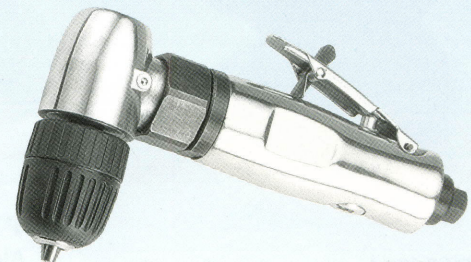

mounted with keyless chuck

PT29241F 10mm, 1900 RPM

MODEL NO.	CHUCK SIZE	SPEED RPM	SPINDLE SIZE	AIR CONS. ℓ / min.	AIR INLET	HOSE SIZE	SOUND POWER / PRES. dBA		VIBRA. M/S^2	LENGTH MM	WEIGHT KG
PT2383	3/8"	2600	3/8"-24	110	1/4"	3/8"	98	87	2.4	215	0.9
PT2380	3/8"	1500	3/8"-24	110	1/4"	3/8"	98	87	2.2	215	1.0
PT2385	3/8"	22000	3/8"-24	110	1/4"	3/8"	98	87	2.4	225	0.7
PT23842	3/8"	4000	3/8"-24	110	1/4"	3/8"	95	85	2.2	190	0.9
PT23811F	3/8"	2000	3/8"-24	110	1/4"	3/8"	96	88	2.2	210	1.0
PT23812F	3/8"	3800	3/8"-24	110	1/4"	3/8"	96	88	2.2	210	1.0
PT292	3/8"	1900	3/8"-24	110	1/4"	3/8"	95	85	2.5	200	1.1
PT1445	3/8"	15000	3/8"-24	110	1/4"	3/8"	96	86	2.4	160	0.6
PT2924	3/8"	1400	3/8"-24	110	1/4"	3/8"	99	86	2.8	210	1.1
PT29241F	3/8"	1900	3/8"-24	110	1/4"	3/8"	99	84	2.6	200	0.8