

Torque External Adjustable
Cushion Clutch Type



PT4140 1800 RPM
PT4140H 800 RPM

Torque Adjustable
Cushion Clutch Type



PT404 1800 RPM
PT404H 800 RPM




PT4180SP
Double Hammer Impact Type
10000 RPM

Torque Adjustable
Cushion Clutch Type



PT4142 1800 RPM
PT4142H 800 RPM


Positive Clutch

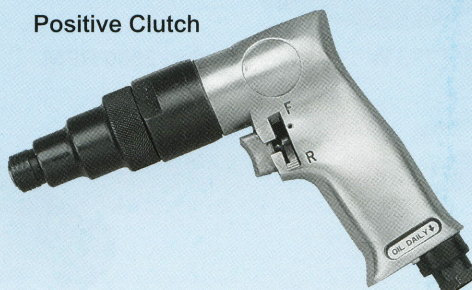


PT407 1800 RPM
PT407H 800 RPM



PT4097A
Double Hammer Impact Type
8000 RPM

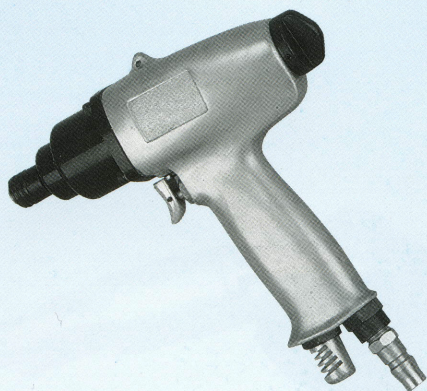

PT40972 Double Hammer Impact Type
10000 RPM

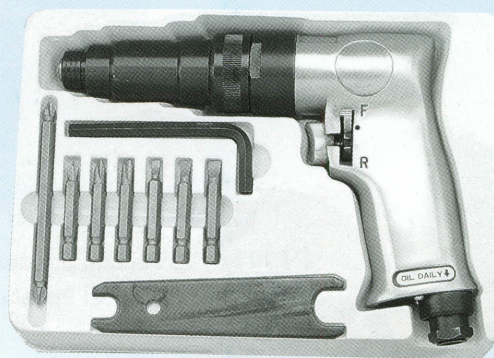

PT404K Adjustable Clutch Air Screwdriver Kit

Contents:

- 1, PT404 - Adjustable Clutch Air Screwdriver
- 7, Screwdriver bit
- 1, Hex Key wrench
- 1, Spanner

MODEL NO.	SHANK HEX. MM	TORQUE RANGE		SPEED RPM	AIR CONS. ℓ / min.	AIR INLET	HOSE SIZE	SOUND POWER / PRES. dBA		VIBRA. M/S^2	LENGTH MM	WEIGHT KG
PT4140	6.35	45-115	5-13	1800	114	1/4"	3/8"	94	83	2.0	230	1.4
PT4140H	6.35	45-145	5-16	800	114	1/4"	3/8"	99	85	2.4	250	1.5
PT404	6.35	45-115	5-13	1800	114	1/4"	3/8"	93	82	2.5	178	1.1
PT404H	6.35	45-145	5-16	800	114	1/4"	3/8"	94	83	2.5	216	1.2
PT4180SP	6.35	60-115	7-13	10000	110	1/4"	1/4"	101	92	4.3	160	0.9
PT4142	6.35	45-115	5-13	1800	114	1/4"	3/8"	94	83	2.5	178	1.1
PT4142H	6.35	45-145	5-16	800	114	1/4"	3/8"	99	86	2.8	216	1.2
PT407	6.35	115	13	1800	114	1/4"	3/8"	92	84	2.4	178	1.1
PT407H	6.35	145	16	800	114	1/4"	3/8"	94	86	2.4	216	1.2
PT4097A	6.35	88-160	10-18	8000	140	1/4"	1/4"	104	92	4.4	175	1.2
PT40972	6.35	160	18	10000	200	1/4"	1/4"	102	92	4.2	180	1.2