


AIR SCREWDRIVER (External Torque Adjustable)




PT41310P2 1500 RPM, Air-Shut-Off Type

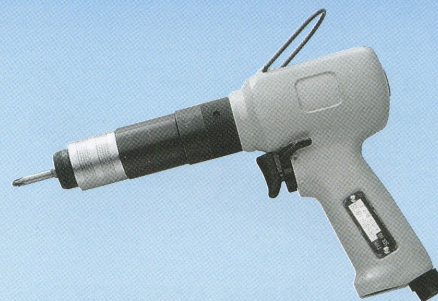


PT41318P2 1100 RPM, Air-Shut-Off Type
PT41518P1 1700 RPM, Cushion-Clutch Type




PT41314P2 900 RPM, Air-Shut-Off Type
PT41514P1 1600 RPM, Cushion-Clutch Type

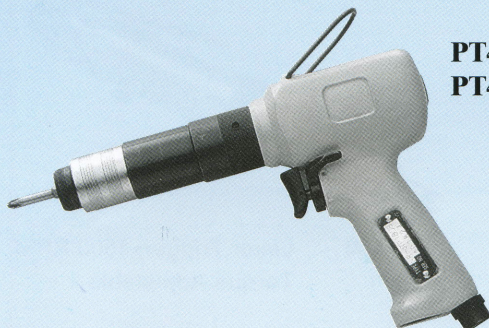


PT41322P2 800 RPM, Air-Shut-Off Type
PT41522P2 800 RPM, Cushion-Clutch Type

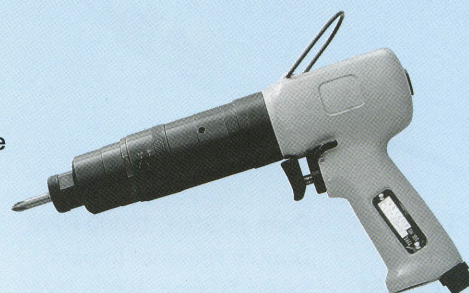


PT41325P3 400 RPM, Air-Shut-Off Type

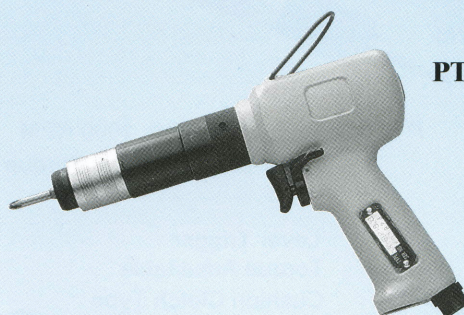

PT41324P2 2000 RPM, Air-Shut-Off Type

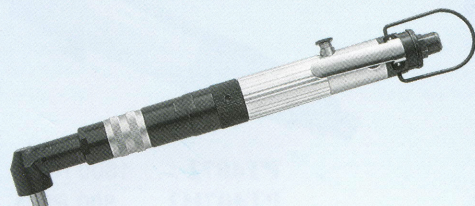

PT41314A1 1600 RPM, Air-Shut-Off Type
PT41514A1 1600 RPM, Cushion-Clutch Type

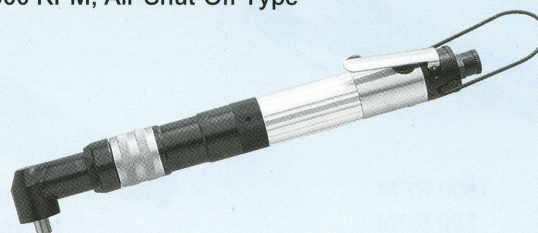

PT41318A1 1700 RPM, Air-Shut-Off Type
PT41318A3 700 RPM, Air-Shut-Off Type
PT41518A1 1700 RPM, Cushion-Clutch Type

MODEL NO.	SHANK HEX. MM	TORQUE RANGE IN-LBS	Nm	SPEED RPM	AIR CONS. ℓ / min.	AIR INLET	HOSE SIZE	SOUND POWER / PRES. dBA	VIBRA. M/S^2	LENGTH MM	WEIGHT KG
PT41310P2	6.35	2-6	0.2-0.7	1500	110	1/8"	1/4"	86 78	2.2	178	0.7
PT41314P2	6.35	10-17	1.1-2.0	900	114	1/4"	1/4"	88 80	2.2	185	0.8
PT41514P1	6.35	6-11	0.7-1.3	1600	114	1/4"	1/4"	88 80	2.2	185	0.8
PT41318P2	6.35	13-30	1.5-3.5	1100	114	1/4"	3/8"	90 82	2.4	206	1.1
PT41518P1	6.35	9-26	1.0-3.0	1700	114	1/4"	3/8"	90 82	2.4	206	1.1
PT41322P2	6.35	26-52	3.0-6.0	800	114	1/4"	3/8"	92 84	2.5	226	1.3
PT41522P2	6.35	26-52	3.0-6.0	800	114	1/4"	3/8"	92 84	2.5	226	1.3
PT41324P2	6.35	26-56	3.0-6.5	2000	114	1/4"	3/8"	95 86	2.5	215	1.5
PT41325P3	6.35	52-148	6.0-17	400	114	1/4"	3/8"	98 89	2.5	230	1.7
PT41314A1	6.35	6-11	0.7-1.3	1600	110	1/8"	1/4"	86 78	2.0	282	0.8
PT41514A1	6.35	6-11	0.7-1.3	1600	110	1/8"	1/4"	86 78	2.0	282	0.8
PT41318A1	6.35	9-26	1.0-3.0	1700	114	1/4"	3/8"	90 82	2.4	315	1.1
PT41318A3	6.35	13-35	1.5-4.0	700	114	1/4"	3/8"	92 84	2.4	315	1.1
PT41518A1	6.35	9-26	1.0-1.3	1700	114	1/4"	3/8"	90 82	2.4	315	1.3