


Push to Start, Button Reverse
Torque External Adjustable



PT413102 1500 RPM, Air-Shut-Off Type
PT413142 900 RPM, Air-Shut-Off Type
PT415141 1600 RPM, Cushion-Clutch Type

Push to Start, Button Reverse
Torque External Adjustable

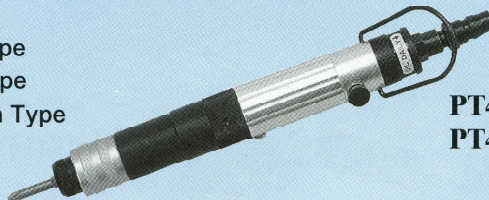


PT413182 1100 RPM, Air-Shut-Off Type
PT415181 1700 RPM, Cushion-Clutch Type


Push to Start, Button Reverse
Torque External Adjustable




PT413222 800 RPM, Air-Shut-Off Type
PT415222 800 RPM, Cushion-Clutch Type

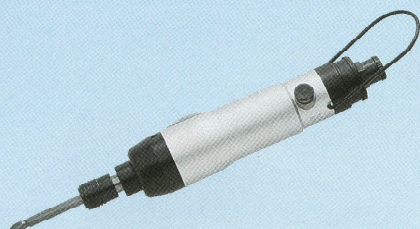

PT4180S Push to Start, 10000 RPM
Double Hammer Impact
PT4180SL Lever Trigger, 10000 RPM
Double Hammer Impact

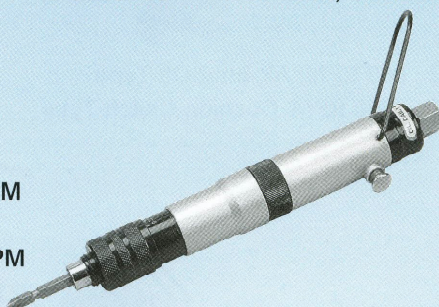


PT4102 Push to Start, 1000 RPM
Air-Shut-Off Type, Torque Adjustable

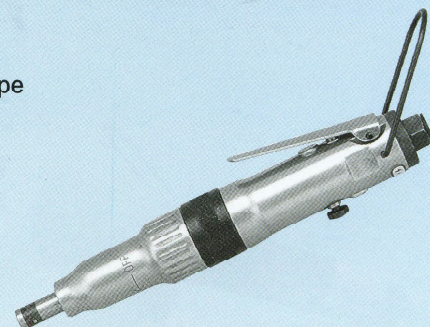


PT400 Lever Trigger, 1500 RPM
Torque Adjustable

Lever Trigger
Torque External Adjustable
Cushion Clutch Type

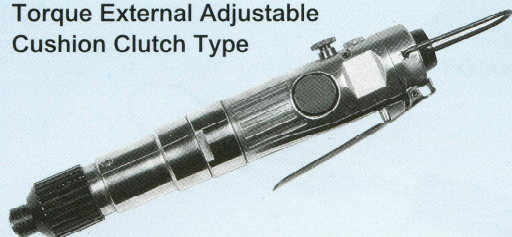

PT4043I 1800 RPM
PT4044I 800 RPM

Lever Trigger
Torque Adjustable
Cushion Clutch Type

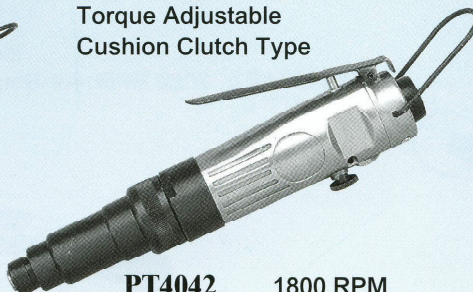

PT4042 1800 RPM
PT404H2 800 RPM

Positive Clutch



PT4072 1800 RPM
PT407H2 800 RPM

MODEL NO.	SHANK HEX. MM	TORQUE RANGE IN-LBS	Nm	SPEED RPM	AIR CONS. l / min.	AIR INLET	HOSE SIZE	SOUND POWER / PRES. dBA	VIBRA. M/S ²	LENGTH MM	WEIGHT KG
PT413102	6.35	4-9	0.4-1.0	1500	110	1/8"	1/4"	86 78	2.0	203	0.3
PT413142	6.35	10-17	1.1-2.0	900	110	1/8"	1/4"	91 82	2.2	216	0.6
PT415141	6.35	6-11	0.7-1.3	1600	110	1/8"	1/4"	88 80	2.1	216	0.6
PT413182	6.35	13-30	1.5-3.5	1100	110	1/8"	1/4"	93 85	2.5	238	0.8
PT415181	6.35	9-26	1.0-3.0	1700	114	1/4"	3/8"	91 82	2.2	238	0.8
PT413222	6.35	26-52	3.0-6.0	800	114	1/4"	3/8"	95 86	2.7	267	1.1
PT415222	6.35	26-52	3.0-6.0	800	114	1/4"	3/8"	95 86	2.7	267	1.1
PT4180S	6.35	62-115	7.0-13	10000	114	1/4"	1/4"	99 91	2.7	207	0.8
PT4180SL	6.35	62-115	7.0-13	10000	114	1/4"	1/4"	100 91	2.7	215	0.8
PT4102	6.35	5-18	0.6-2.0	1000	114	1/4"	3/8"	91 82	2.2	235	0.7
PT400	6.35	10-30	1.1-3.5	1500	114	1/4"	3/8"	92 83	2.2	250	0.7
PT4043I	6.35	45-115	5.0-13	1800	114	1/4"	3/8"	95 86	2.5	265	1.3
PT4044I	6.35	45-145	5.0-16	800	114	1/4"	3/8"	95 86	2.5	290	1.5
PT4042	6.35	45-115	5.0-13	1800	114	1/4"	3/8"	108 102	2.2	250	1.1
PT404H2	6.35	45-145	5.0-16	800	114	1/4"	3/8"	102 96	2.2	280	1.2
PT4072	6.35	115	13	1800	114	1/4"	3/8"	98 89	2.0	250	1.1
PT407H2	6.35	145	16	800	114	1/4"	3/8"	98 89	2.0	280	1.2