

PRODUCT INFORMATION

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND FOLLOWING
CATALOGUE NUMBER



SPT237

PAGE 1 of 2

Hydraulic Torison Impact Socket Set

Feature :

- Innovational Built-in Hydraculic device provide forward torsion torque output which decide by direct ratio input toruqe.
- The toruqe setting capacity is from 40 Nm ~ 220 Nm.
- It can be used as torsion bar for the forward tightening job with accurate stable value ($\pm 10\%$), meanwhile, it cab be used as normal impact socket to loosen the wheel nut which the torsion bar can't do.

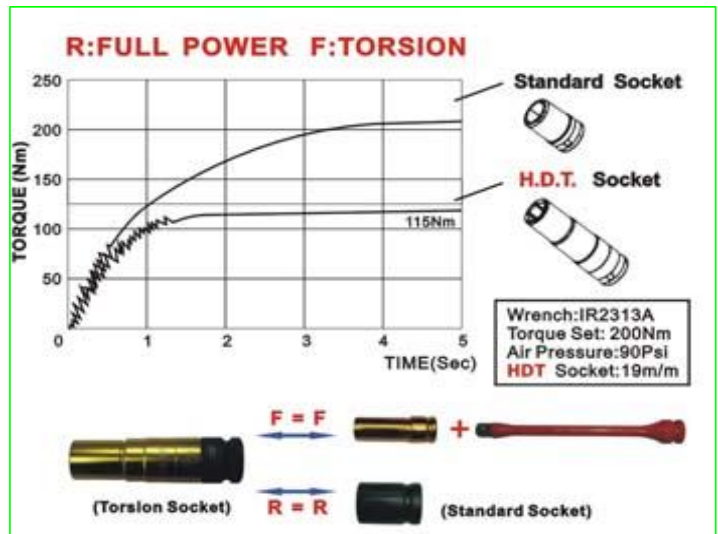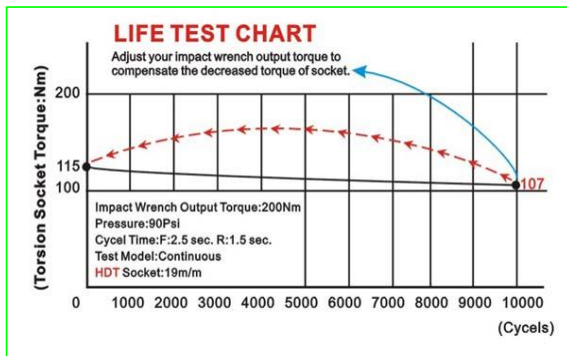

NO MORE TORSION BAR!

Material : Chrome-Molybdenum
Size : 17mm, 19mm, 21mm

PT0248K01 3 PCS 1/2" DR. Hydraulic Torsion Imacpt Socket Set
Socket Deepth : 100 mm

PT0248K02 3 PCS 1/2" DR. Hydraulic Torsion Imacpt Socket Set
Socket Deepth : 150 mm



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL. No.325, FU HSING N. ROAD.
TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX : 886-2-27152218
<http://www.himount.com>
E - MAIL: info@himount.com

PRODUCT INFORMATION

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND FOLLOWING
CATALOGUE NUMBER

SPT237

PAGE 2 of 2

Torque Limited Impact Socket Set

Feature :



- This socket is a clutch constructed. The spring and clutch device will be limited the torque strength while forward operation to prevent fastening damaged by over torque.
- The socket will be transferred full torque from the impact wrench while reverse operation. This function can be make the unfastened operation faster.
- This socket is not a torque gauge. Please double check the torque strength by torque wrench.
- Set to 100 Nm (10 kg/cm²)

How to use :

Step 1: To remove the lug nuts with full torque delivery of impact wrench.

Step 2: Patented design for fastened the lug nut quick and accurate to reach the safety torque strength. The torque socket will free running automatically while reach the presetting torque.

Step 3: Check the torque strength by torque wrench, according to the maintenance manual of different vehicles. To ensure the nuts fastened securely with correct torque strength.

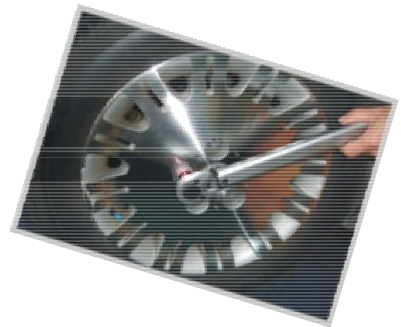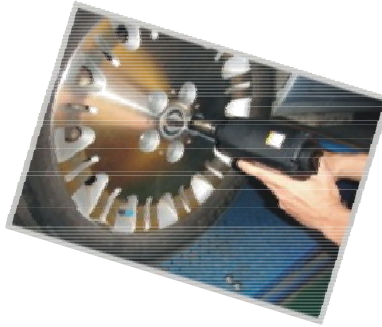

Material : Chrome-Molybdenum
Size : 17mm, 19mm, 21mm

NO MORE TORSION BAR!

PT0247K01 3 PCS 1/2" DR. Torque Limited Impact Socket Set
Socket Depth : 100 mm

PT0247K02 3 PCS 1/2" DR. Torque Limited Impact socket Set
Socket Depth : 150 mm



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL. No.325, FU HSING N. ROAD.
TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX : 886-2-27152218
<http://www.himount.com>
E - MAIL: info@himount.com