

ANTI-SPARKLE HOSE


We offer the special hose to protect the Tubing from incidental contact with weld spatter.
Ideal for applications in rugged or higher temperature environments.

Compositions :

Inner layer : Polyurethane Tubing

Outer layer : Special Formulated Flame Retard meets UL94 VO requirement

Temperature Range : -40°C to + 70°C

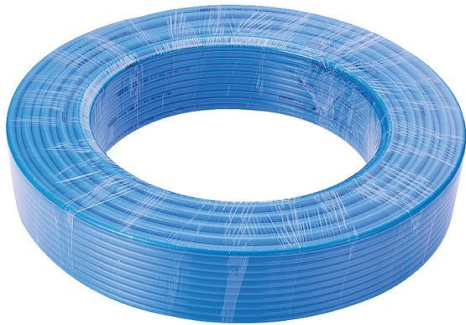

STRAIGHT TYPE

Model	Hose I.D.	Hose O.D.	Hose Length	Inlet/Outlet	Working Pressure	Burst Pressure
PT034915	4.0mm	6.0mm	50M	-	12 bar	36 bar
PT034925	5.0mm	8.0mm	50M	-	10 bar	30 bar
PT034935	6.5mm	10.0mm	50M	-	10 bar	30 bar
PT034945	8.0mm	12.0mm	50M	-	10 bar	30 bar



RECOIL TYPE

Model	Hose I.D.	Hose O.D.	Hose Length	Inlet/Outlet	Working Pressure	Burst Pressure
PT034911A	4.0mm	6.0mm	8M	1/4"	12 bar	36 bar
PT034912A			12M			
PT034921A	5.0mm	8.0mm	8M	1/4"	10 bar	30 bar
PT034922A			12M			
PT034931A	6.5mm	10.0mm	8M	1/4"	10 bar	30 bar
PT034932A			12M			
PT034941A	8.0mm	12.0mm	8M	1/4"	10 bar	30 bar
PT034942A			12M			

