


PRODUCT INFORMATION

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND FOLLOWING
CATALOGUE NUMBER

SPT249

Stainless steel Retractable Hose Reel

- Stainless steel hose reels are ideal for low and medium pressure general air, water, solvent and chemical transfer, pre-rinse, pressure wash and washdown uses.
- Great for coastal, offshore and on-board ship in marine applications where the harsh environment of salt water spray requires the use of stainless steel hose reels.
- Electrolytic polishing process gives a lustrous mirror-like finish while providing added protection against corrosion and contamination.
- Latch mechanism is non-sparking, Spring-loaded retraction
- Disc diameter: 440 mm
- Working pressure range from 20 Bar to 345 Bar (300 psi ~ 5000 psi)

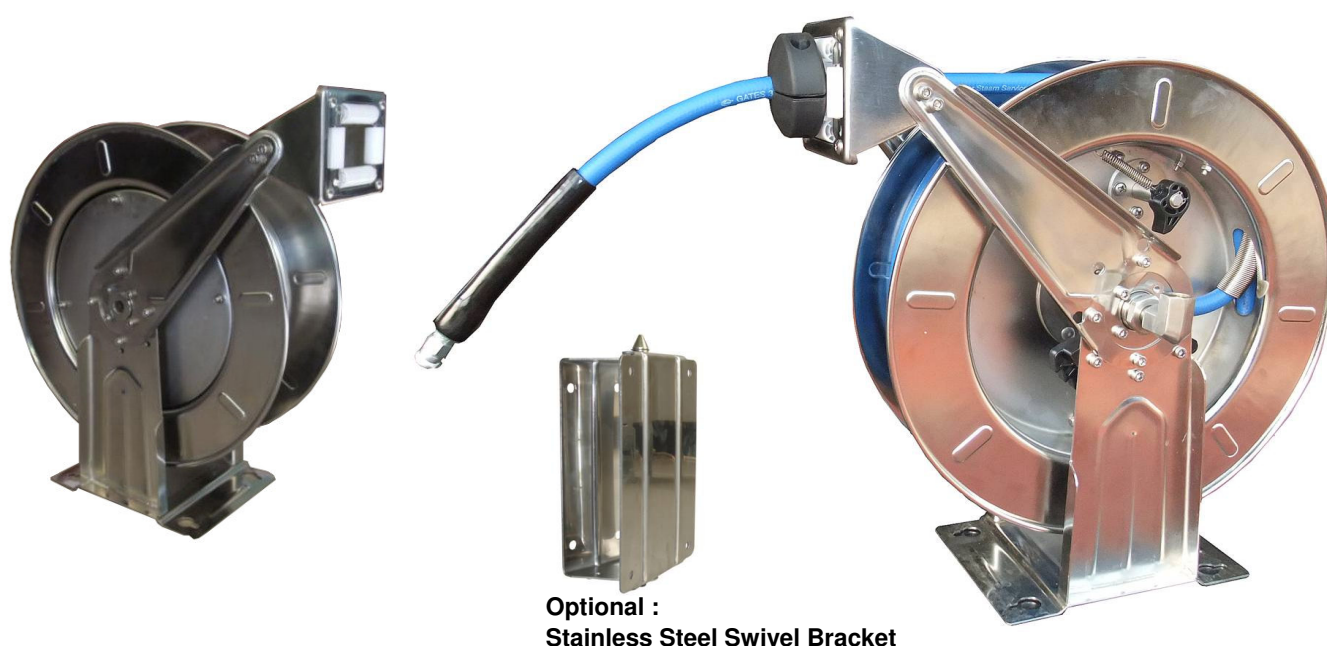

Reinforcement Two braids of high tensile steel wire
High Pressure hydraulic lines Meets requirements of :
SAE 100 R2AT / DIN EN 853 2SN STANDARD
Cover: Black, oil and abrasion resistant Neoprene (CR)



Item No.	Hose Capacity			Inlet/outlet	Working Pressure		Temperature Range	Net Weight
	Material	I.D.	Length		Bar	psi		KGs
Low Pressure								
PT047601	Without Hose			NIL	NIL	NIL	NIL	13.0
PT047602	PU Hose	3/8"	15 M	3/8"	20	300	- 20℃ ~ 70 ℃	16.5
PT047604	PU Hose	1/2"	10 M	1/2"	20	300	- 20℃ ~ 70 ℃	16
Medium Pressure								
PT047611	Without Hose			NIL	NIL	NIL	NIL	13.0
PT047612	Rubber Hose	3/8"	15 M	3/8"	175	2500	- 40℃ ~ 100 ℃	18.5
PT047614	Rubber Hose	1/2"	10 M	1/2"	138	2000	- 40℃ ~ 100 ℃	17
PT047615	Rubber Hose	1/2"	15 M	1/2"	138	2000	- 40℃ ~ 100 ℃	18.5
High Pressure								
PT047621	Without Hose			NIL	NIL	NIL	NIL	13.5
PT047622	High Pressure	1/4"	15 M	1/4"	345	5000	- 40℃ ~ 100 ℃	18.5
PT047623	Rubber Hose	3/8"	15 M	3/8"	276	4000	- 40℃ ~ 100 ℃	19



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL. No.325, FU HSING N. ROAD.
TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX : 886-2-27152218
<http://www.himount.com/>
E - MAIL: himount@himount.com