

PRODUCT INFORMATION

Safety Low Noise Connector Series

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND FOLLOWING
CATALOGUE NUMBER
SPT253

- Two steps release function to ensure workers against accidents by nipple shooting or hose whipping
- Push-in Connection for easy use
- The unique pressure release design can release remain pressure quietly and safety
- No rebound and low noise level

Safety Coupler




1st Step:
Pull the sleeve to release air




2nd Step:
Pull the sleeve to disconnect the nipple

F1GEM021		1/4" Safety Coupler Male	1/4" Male	Working Pressure: 14.5Bar / 210psi Maximum pressure: 19.5Bar / 280psi Temperature Range: -20°C ~ +80°C Air Flow: 1800 l/min (63.5 CFM) Material: Brass + Nickle Plated
F1GEM031		European-Nipple	3/8" Male	
F1GEM041			1/2" Male	
F1GEF021		1/4" Safety Coupler Female	1/4" Female	
F1GEF031		European-Nipple	3/8" Female	
F1GEF041			1/2" Female	
F1GEH021		1/4" Safety Coupler with Rubber Grip Hose	1/4" Hose	
F1GEH031		European-Nipple	3/8" Hose	
F1GEH041			1/2" Hose	

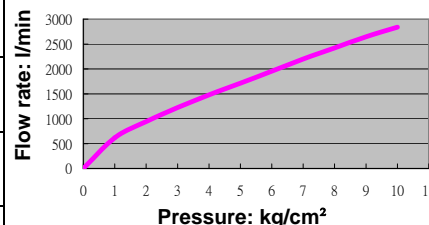

Safety Nipple

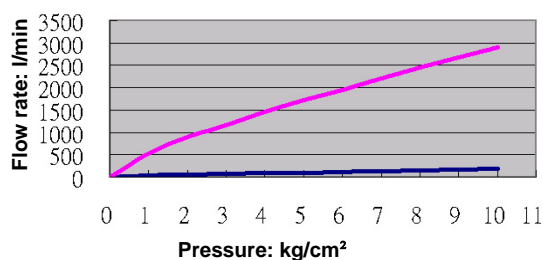

F1HEM2



1/4" Safety Nipple - 1/4" Male
Material: Steel + Nickle Plated

F1HEH3



1/4" Safety Nipple - 3/8" Hose
Material: Steel + Nickle Plated



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL. No.325, FU HSING N. ROAD.
TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX: 886-2-27152218
<http://www.himount.com/>
E-MAIL: info@himount.com