

Magical Angle Impact Wrench



Breaking through space barriers without hassle !!
Powerful Torque Output

Work Torque: 332 ft.lbs (450 Nm) / Max. Torque: 369 ft.lbs (500 Nm)
 Bolt Breakaway Torque: 966 ft.lbs (1310 Nm)

FOR YOUR INQUIRIES, PLEASE
 INDICATE MODEL NO., AND
 FOLLOWING
 CATALOGUE NUMBER
SPT341
 P.1 of P.2


Twin Hammer Mechanism

Durable, less vibration, excellent balance and no reaction force.
 Ultra short length **85mm** only.



120° Bend-over Hammer Head

The hammer head can 60 degree bend over forward & backward respectively. Freely reach to the target bolt even in confined, restrained space.

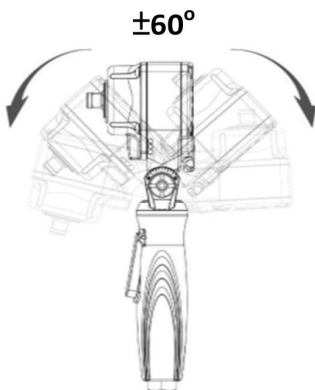

Motor with "Double Air Intake" System

By increased air flow can largely deliver powerful output.



360° Free Swivel Handle


Even if the anvil can reach to the target, the trigger might be stuck by obstacles. Slightly rotate the handle can find the trigger successfully.




PT521932

Patented Technology „Double Air Intake“

Reshape air motor construction to Double-Air-Intake and Double-Air-Exhaust, largely increase air intake and rapidly exhaust after work. Significantly improve rotor efficient to high peak.

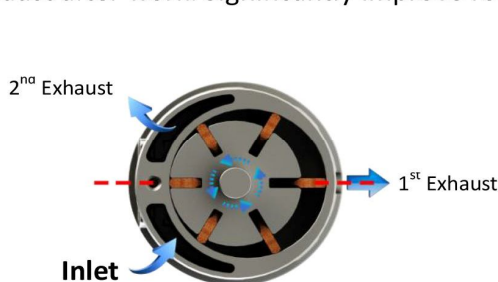

Air-Intake Normal Type

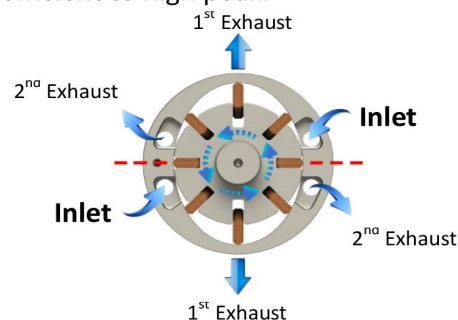

Double Air Intake



HIMOUNT INDUSTRIAL CO., LTD.
 7TH FL., NO. 325, FU HSING N. ROAD, TAIPEI, TAIWAN
 TEL: 886-2-27135577 886-2-27188886
 FAX: 886-2-27152218
 E-MAIL: info@himount.com
<http://www.himount.com/>

Speed Controllable Trigger

Ensure the Anvil working steadily, prevent bolts from damage.

Aluminum Housing

Aluminum housing gives hammer kit a very rugged & robust protection.

Socket Kit

Options in Mini, Regular & Longer size.



Contents:	
1PC	PT523022
9PCS	Mini sockets (CR-MO) 13, 14, 15, 16, 17, 18, 19, 21, 24mm
3PCS	Thin Wall Impact Sockets 17, 19, 21mm (Chrome-Molybdenum)
1PC	75mm Extension Bar
1PC	Oil Pot
1PC	Nipple
1PC	Plastic Case

Application

Mainly aim for working in confined space wherer with obstacles, like gearbox, engine, transmission, farming cultivator and so on.



Ergonomic Handle

Plastic & ergonomic design for lightweight, anti-slip, better grip and no sweat on handle operation.

Low Sound Level

Hindden muffler can greatly decrease working noise.

Angle Regulator

The angle of hammer head can be adjusted or fixed by the regulator as required.



Specification

Model No.	PT523022
Hammer Mechanism	Twin Hammer
Square Drive	1/2"
Bolt Capacity	1/2" (13 mm)
Working Torque	332 FT-LB (450 N-m)
Max. Torque	369 FT-LB (500 N-m)
Breakaway Torque	966 FT-LB (1310 N-m)
Free Speed	8,000 R.P.M.
Air Consumption	4 CFM (28scfm, 113.3 L/min.)
Air Inlet	1/4"
Air Pressure	90 PSI
Air Hose	3/8" (10 mm)
Overall Length	85 mm
Net Weight	1.336 kg
Sound Pressure	90.2 dB(A)

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND
FOLLOWING
CATALOGUE NUMBER

SPT341
P.2 of P.2

