


# Digital Torque Ratchet

FOR YOUR INQUIRIES, PLEASE  
INDICATE MODEL NO., AND FOLLOWING  
CATALOGUE NUMBER

**STS206**

*Affordable Ratchet with digital Torque read-out*

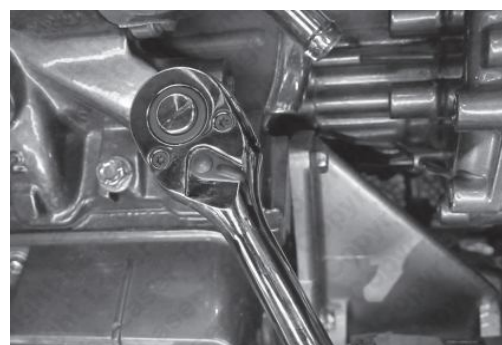

| Model No                             | TS168002                         | TS168004                   | TS168006                     |
|--------------------------------------|----------------------------------|----------------------------|------------------------------|
| Drive / Teeth                        | 1/4" / 72T                       | 3/8" / 72T                 | 1/2" / 72T                   |
| Accuracy                             | ± 4%                             | ± 3%                       | ± 3%                         |
| Accuracy Range                       | 6-30 Nm<br>4.4-22.1 Lb/ft        | 12-60 Nm<br>8.5-44.2 Lb/ft | 20-100 Nm<br>14.7-73.8 Lb/ft |
| Display Range                        | 1-30 Nm                          | 1-60 Nm                    | 1-100 Nm                     |
| Alarm Range                          | 1-30 Nm                          | 3-60 Nm                    | 5-100 Nm                     |
| Preset                               | 1                                |                            |                              |
| Resolution                           | 0.1 Nm                           |                            |                              |
| Memory                               | 50                               |                            |                              |
| Unit                                 | 4 (Nm, Lb/Ft, In/Ft, Kg/m)       |                            |                              |
| Backlight                            | Yes                              |                            |                              |
| Alert                                | LED & Buzzer                     |                            |                              |
| Mode                                 | Peak/Track                       |                            |                              |
| Length (mm)                          | 200                              | 220                        | 255                          |
| Weight (kg)                          | 0.5                              | 0.6                        | 0.7                          |
| Battery                              | AAA x 2pcs                       |                            |                              |
| Battery Life                         | 100 hrs                          |                            |                              |
| Auto Shut Off<br>(Power Saving Mode) | 70 seconds                       |                            |                              |
| Storage Temperature                  | -20°C - +70°C (-4°F - +157.9°F)  |                            |                              |
| Operating Temperature                | -10°C - +60°C (+14°F - +139.9°F) |                            |                              |
| Operating Humidity                   | 15-90% non-condensing            |                            |                              |



20180507 HIJ

HIMOUNT INDUSTRIAL CO., LTD.  
7TH FL., NO. 325, FU HSING N. ROAD, TAIPEI, TAIWAN  
TEL: 886-2-27135577 886-2-27188886  
FAX: 886-2-27152218  
E-MAIL: [info@himount.com](mailto:info@himount.com)  
<http://www.himount.com/>