

PRODUCT INFORMATION


FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND FOLLOWING
CATALOGUE NUMBER
STT019

AIR TAPPING MACHINE


** Is a machine for all general purpose tapping, from small, sensitive, non-ferrous applications up to heavy tapping requirements in mild steel.*

** With lubricated for life, impregnated bushings at all swivel points, provides "weightless" operation and permits the operator to bring the tap to the hole with ease.*

Model AS2

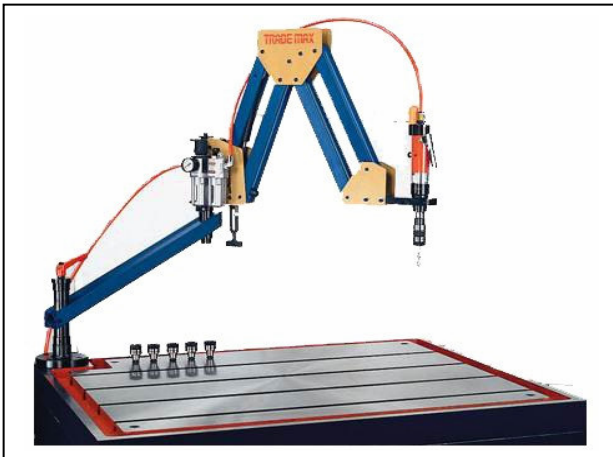

Model AT2

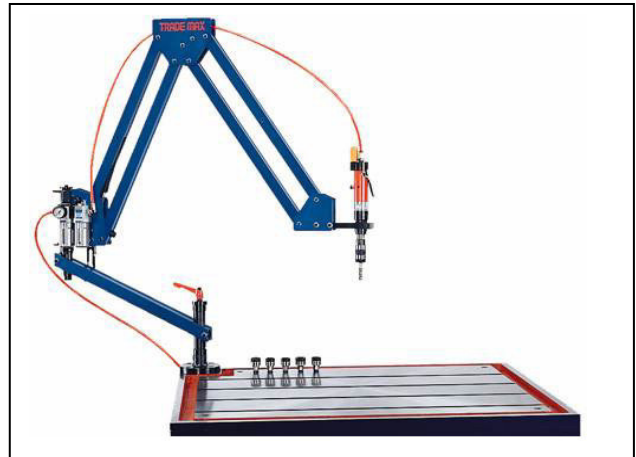

SPECIFICATIONS:

Model	AS2-08	AS2-12	AS2-16	AT2-08	AT2-12	AT2-16	AT2-20
Tap size	M2-M8	M3-M12	M3-M16	M2-M8	M3-M12	M3-M16	M4-M20
Speed (RPM)	700	400	400	700	400	400	150 / 400
Work Radius, Min.	200 mm			200 mm			200 mm
Work Radius, Max	1400 mm			1900 mm			1900 mm
N.W. (kgs)	16	16	18	18	18	20	28
G.W. (kgs)	18	18	20	20	20	22	31

STANDARD ACCESSORIES :

1. Air tapping motor with air hose (7.5 mm x 10 mm x 2 M)
2. Table mounting column
3. Any 6 safety clutch tapping adapters
4. Air preparation unit (1/2" air inlet)
5. Parallel arm
6. Radial jib



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL. No.325, FU HSING N. ROAD.
TAIPEI, TAIWAN, R. O. C.
TEL: 886-2-27135577 FAX : 886-2-27152218
EMAIL: himount@himount.com