
## FOR YOUR INQUIRIES, PLEASE INDICATE MODEL NO., AND FOLLOWING CATALOGUE NUMBER **SUM018** Vehicle Refitting

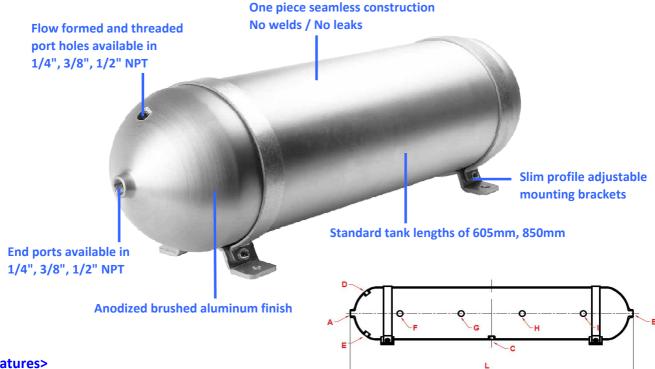

## <Features>

- 1. One piece seamless construction for better sealing.
- 2. A fresher aesthetic, stronger resistance in rust.
- 3. The air tanks are in compliance with SAE J10 standard.
- 4. The aluminum tanks are lighter than steel and stainless steel tanks.
- 5. It is widely applied for vehicle refitting, models of vehicle are not limited. 6. It is mainly used for air suspension, air horn, air storage equipment, etc.

## <Specifications>

- → Rated working pressure: 200 PSI
- → Burst pressure: more than 1000 PSI

Model No	Material / Surface Treatment	Gallon	Diameter	Length	NPT Port
			(mm)	(mm)	1/4" or 3/8" or 1/2"
UM5305231	Aluminum / Anodized Brushed	3	168	605	5 Ports
UM5505231	Aluminum / Anodized Brushed	5	168	850	5 Ports

## <Applications>

for automobile horn system



for automobile brake system



for automobile suspension system (shock absorber system)









HIMOUNT INDUSTRIAL CO., LTD. 7TH FL., NO. 325, FU HSING N. ROAD, TAIPEI, TAIWAN TEL: 886-2-27135577 886-2-27188886

FAX: 886-2-27152218 E-MAIL: info@himount.com http://www.himount.com/