



Double Air Intake

FOR YOUR INQUIRIES, PLEASE
INDICATE MODEL NO., AND FOLLOWING
CATALOGUE NUMBER

SPT316

1/2" Dr. Composite Impact Wrench

PT523014

150mm handy & light with high torque performance, working in narrow space

150mm




Viton oil seal to prevent oil leakage after long performance

Ergonomic comfort handle with good balanced for performance

Perfect patented high performance motor system; delivers highest torque in absolutely small machine



One hand operation, easily to switch Forward and Reverse by one Thumb; setting with 1 speed of Reverse, 2 speed of Forward

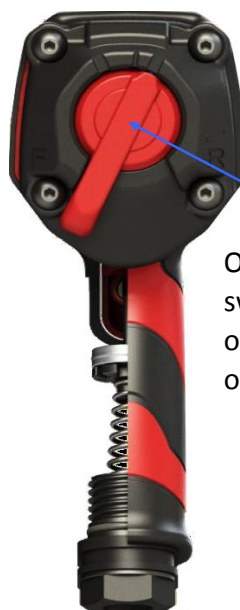


Technical Specification


Mechanism	: Twin Hammer, Handle Exhaust
Max. Torque	: 1,000 Ft-Lb (1,356 Nm)
Working Torque	: 750 Ft-Lb (1,017 Nm)
Nut Busting Torque	: 1,715 Ft-Lb (2,325 Nm)
Free Speed	: 8,200 R.P.M.
Overall Length	: 150mm
Net Weight	: 1.6 Kgs
Bolt Capacity	: 16mm
Air Consumption	: 5.2 CFM
Air Pressure	: 90 PSI
Air Inlet	: 1/4"
Air Hose	: 3.8" (10mm)

Patented Technology

Normal Air Intake:

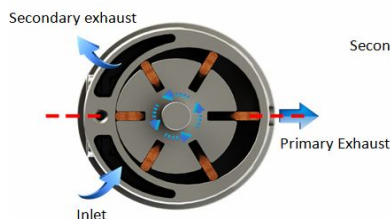

Double Air Intake:



HIMOUNT INDUSTRIAL CO., LTD.
7TH FL., NO. 325, FU HSING N. ROAD, TAIPEI, TAIWAN
TEL: 886-2-27135577 886-2-27188886
FAX: 886-2-27152218
E-MAIL: info@himount.com
<http://www.himount.com/>